


# METRIC FASTENERS

## SEMS DIN 7985 Pan Phillips w/modified DIN 127B Spring Lock Washer

Fasteners By Design Inc.

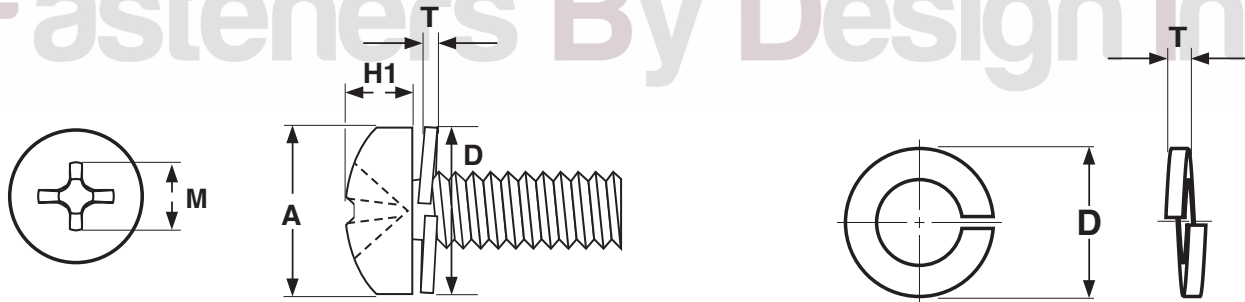

<b>METRIC - DIN 7985 PAN PHIL SPRING LOCKWASHER SEMS</b>										DIN 7985 DIN 127B
Machine Screw Dimensions							Spring Lockwasher Dimensions			Phillips Driver Size
Nominal Size	Thread Pitch	A		H1		M	D	T		
		Head Diameter		Height of Head		Recess Diameter	Outside Diameter	Section Thickness		
		Max	Min	Max	Min	Ref	Max	Max	Min	
M3	0.5	6.00	5.70	2.52	2.28	3.10	6.2	0.90	0.70	1
M4	0.7	8.00	7.64	3.25	2.95	4.60	7.6	1.00	0.80	2
<b>Tolerance on Length</b>							4mm thru 6mm	± 0.24		
							8mm thru 10mm	± 0.29		
							12mm thru 18 mm	±0.35		
							20mm thru 30 mm	±0.42		

<b>Description</b>	A cross-recessed, pan head machine screw with a free-spinning, captive, spring lockwasher.		
<b>Applications/ Advantages</b>	The washer/screw assembly makes this a locking screw with the washer providing the locking action. Machine pre-assembly provides cost savings to the end user. The spring lockwasher variety is preferred for use with hardened bearing surfaces.	The stainless steel variety of this Sems screw offers the same advantages as its steel counterpart but is designed to be used only with 18-8 or A2 stainless materials.	
<b>Component</b>	<i>Screw</i>		<i>Spring Lockwasher</i>
<b>Material</b>	Steel	Stainless	Steel
	Class 4.8 steel	18-8 or A2 stainless	Spring Steel
<b>Hardness</b>	Rockwell B 71 - 99.5	-	HV 450 - 530
<b>Tensile Strength</b>	60,900 psi.	-	-
<b>Plating</b>	Sems are available in a clear zinc finish and baked after plating.		Stainless Sems are typically supplied passivated but without any additional finish.